

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.18	LiuZH	JIN

- Material
 - ①Screws : M3.0 steel, Ni plated
 - ②Terminal : Brass, Tin plated
 - ③Housing : PA66,UL94V-0






- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 10A 17.5A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-16AWG 1.5mm²

- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 0.5N.m (4.43lb.in)

• RoHS compliance

HOW TO ORDER

HB-635TR-6.35-XXP-1 X-XXXXX

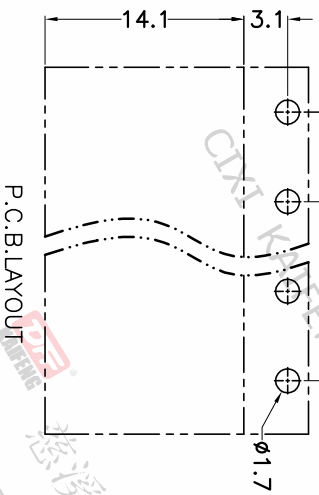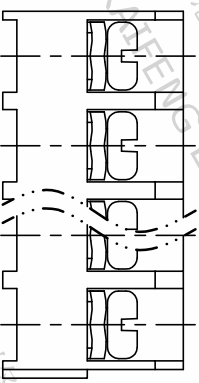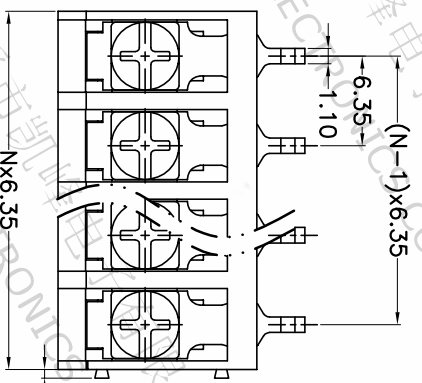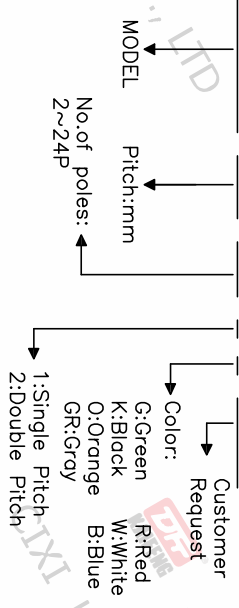

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>30	0.1/10	mm
~6	~60	\leq	\leq
~10	~100	\leq	\leq
~24	~150	\leq	\leq
±0.15	±0.30	±2°	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
DRAWING NO.	W12000082

PROJECTION	TITLE
UNIT	HB-635TR-6.35-XXP-1X
SHEET SIZE	A4
SERIES	HB-635TR

DFE 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

