
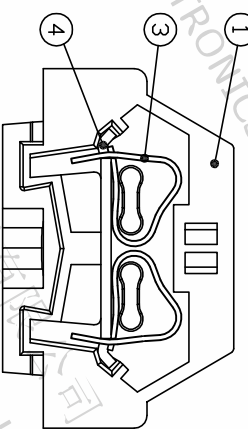
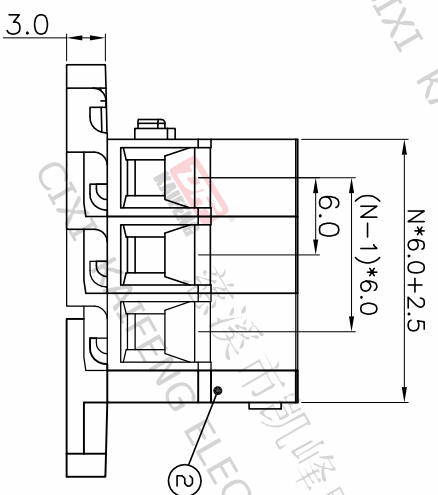
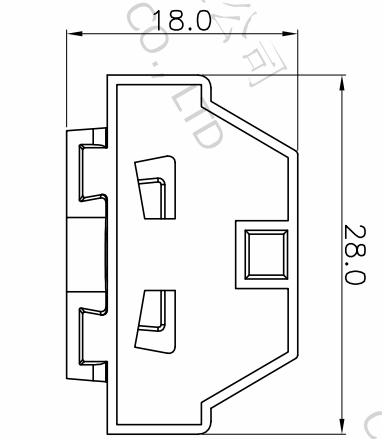


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.25	DENG	JIN

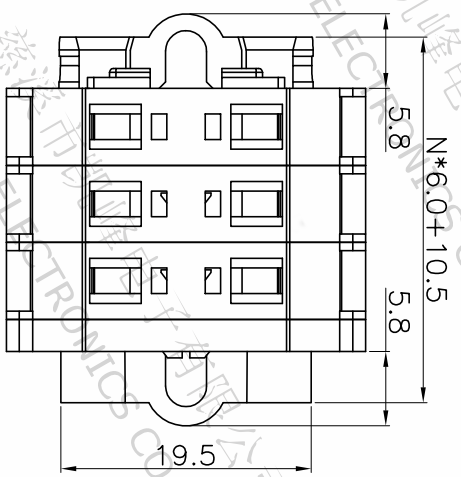

- Material
 - ①Housing : PA66, UL94V-0
 - ②Cover : PA66, UL94V-0
 - ③Reed : Stainless steel
 - ④Pin header : Copper alloy, Tin plated


- Electrical

UL	IEC
Rated voltage : 300V	450V
Rated current : 15A	24A
Contact resistance : 20mΩ(Max)	
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2500V/1min	
Wire range: 26-14AWG	2.5mm ²

- Mechanical
 - Operating temperature: -40°C~+105°C
 - Soldering temperature: 250°C±5/5sec
 - Strip length: 8-9mm
- RoHS compliance

HOW TO ORDER

KF256-6.0-XXP-1 X-XXXXX

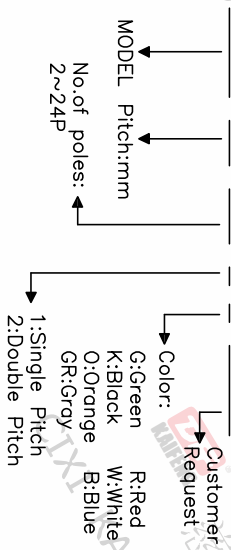

Pitch range	Nominal dimension range	Projection
>0	>0	0.1/10
~6	~30	□
~10	~60	□
~24	~100	□
~30	~150	□
±0.15	±0.30	□
±0.20	±0.30	□
±0.30	±0.50	□
±0.70	±1.00	□
±1.30	±2.00	□

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W11000052

PROJECTION	UNIT	TITLE
mm	A4	KF256-6.0-XXP-1X
SHEET SIZE	SERIES	
A4	KF256	

DFE 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD