

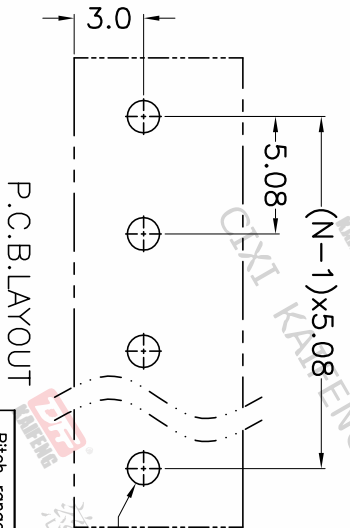

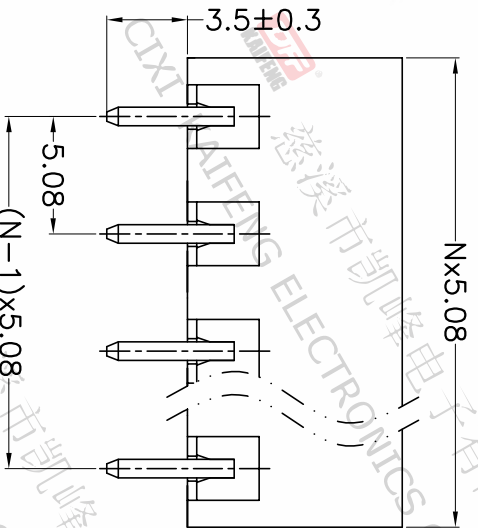
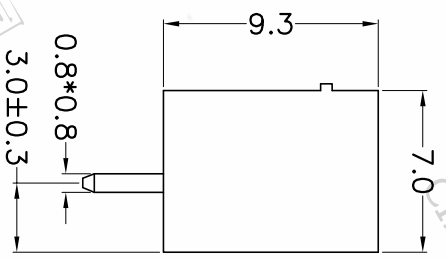


| REV | DESCRIPTION | DATE | DRAFTER | APPROVER |
|-----|-------------|-----------|---------|----------|
| A1 | DWG.REL | 2020.6.08 | ZHANG | JIN |

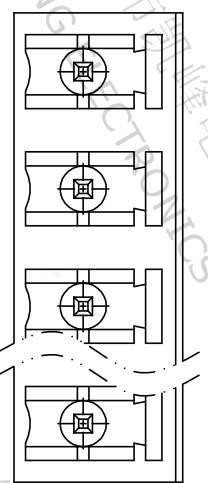

- Material
 @Housing : PA66, UL94V-0
 @Pin header : Copper alloy, Tin plated
- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 8A 7A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5/5sec
- RoHS compliance

HOW TO ORDER
 KF2EDGV-Y-5.08-XXP-1 X-XXXXX

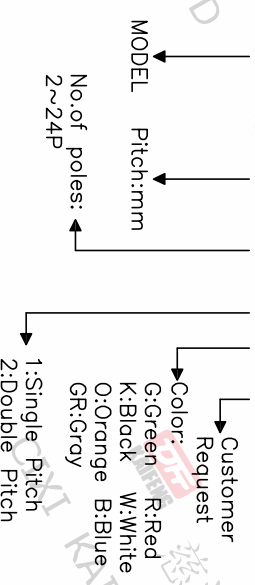

| Pitch range | Nominal dimension range | PROJECTION | UNIT | TITLE |
|-------------|-------------------------|------------|------|-----------------------|
| >0 | >0 | 0.1/10 | mm | KF2EDGV-Y-5.08-XXP-1X |
| >6 | >30 | 1/10 | mm | |
| ~6 | ~30 | 1/10 | mm | |
| ~10 | ~60 | 1/10 | mm | |
| ~24 | ~100 | 1/10 | mm | |
| ±0.15 | ±0.30 | ±2' | | |

| DRAWING TYPE | CUSTOMER DRAWING | SHEET | 1 OF 1 |
|--------------|------------------|-------|--------|
| SCALE | 1:1 | | |
| DRAWING NO. | W10000922 | | |

DF
 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD