
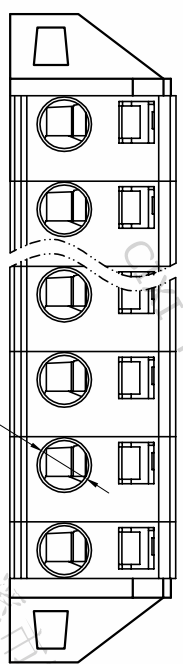
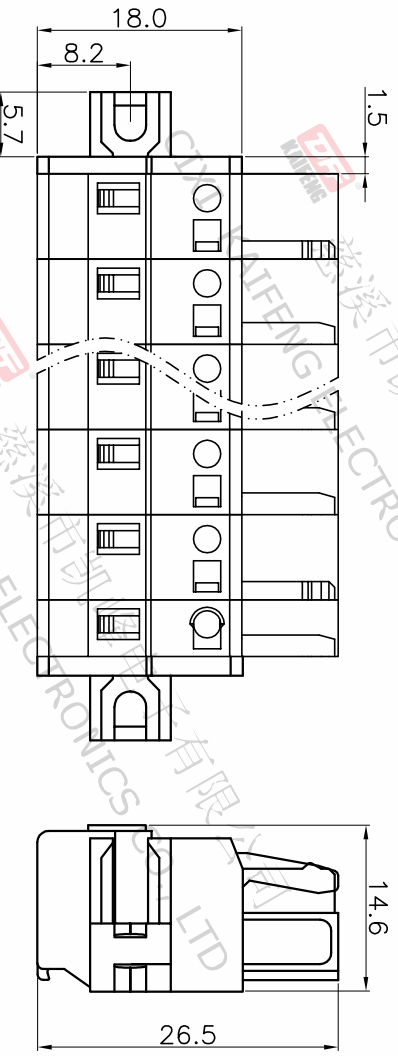


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

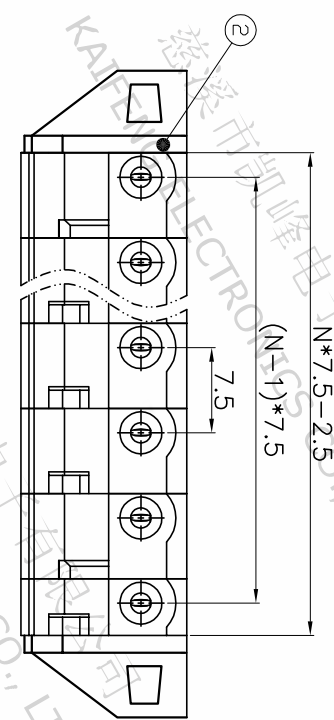


- Material
  - ① Housing: PA66, UL94V-0
  - ② Plastic cover: PA66, UL94V-0
  - ③ Clip: Copper alloy, Silver plating.
  - ④ Reed: Stainless steel

- Electrical UL IEC
  - Rated Voltage: 300V 630V
  - Rated Current: 15A 16A
  - Contact Resistance: 20mΩ
  - Insulation Resistance: 500MΩ/DC500V
  - Withstanding Voltage: AC1500V/1Min
  - Wire range: 28-12AWG 0.2-2.5mm<sup>2</sup>

- Mechanical
  - Temperature Range: -30°C~+105°C
  - MAX Soldering: +250°C.(5 Seconds)

• RoHS compliance

HOW TO ORDER

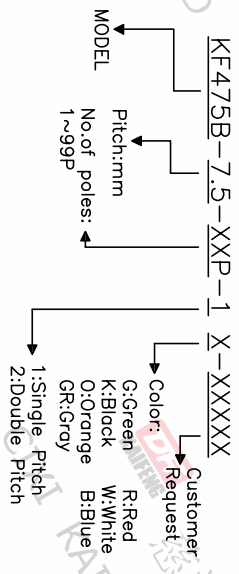

Pitch range	Nominal dimension range	PROJECTION
>0	>30	0.1/10
~6	~60	~
~10	~100	~
~24	~150	~
±0.15	±0.30	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W16000162

TITLE	PROJECTION	UNIT	SHEET SIZE	SERIES
KEF475B-7.5-XXP-1X	1st Angle	mm	A4	KEF475

**慈溪市凯峰电子有限公司**  
CIXI KAIFENG ELECTRONICS CO.,LTD